


.28 [7.1] THK. MTG. FLANGE

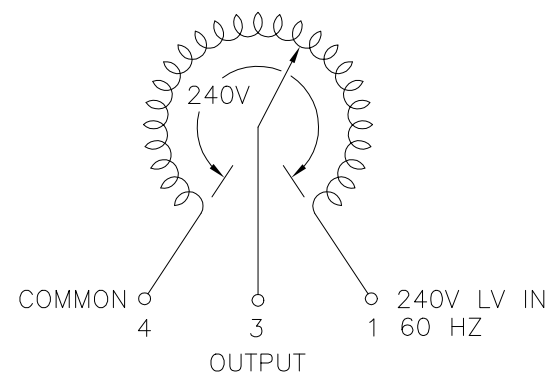

SCHMATIC
 VIEW FROM BASE END
 FUSE RECOMMENDED BUT NOT SUPPLIED

SPECIFICATIONS											
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS			
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD	CONSTANT IMPEDANCE LOAD	FOR INCREASING VOLTAGE AS VIEWED FROM BASE END					
				MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA		INPUT	JUMPER	OUTPUT
SINGLE PHASE	240	60	0-240	5.0	1.20	7.0	1.68	CW	1-4	---	4-3
								CCW	1-4	---	1-3

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS #				UNITS		TITLE: SPEC. CONTROL DRAWING						
DECIMALS	HOLES	ANGLES	DRAFT	IN [mm]		VARIABLE TRANSFORMER						
.XX	.0005	.002	1°			TYPE: 1220BCT						
MATERIAL:				ALL DIMENSIONS APPLY AFTER PLATING		DRAWN BY: S.A. SMITH		DATE: 9/26/97	FIRST USED ON:	DO NOT SCALE DWG.	CUSTOMER APPROVAL:	DATE:
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.						CHECKER:	DATE:	WEIGHT APPROX. 10.25 LBS	CODE IDENT. NO. 83008	DWG. NO. 031-3306	DWG. NO. 031-3306	
						ENGINEER:	DATE:	SCALE 1=1	SHEET 1 OF 1	D		

