
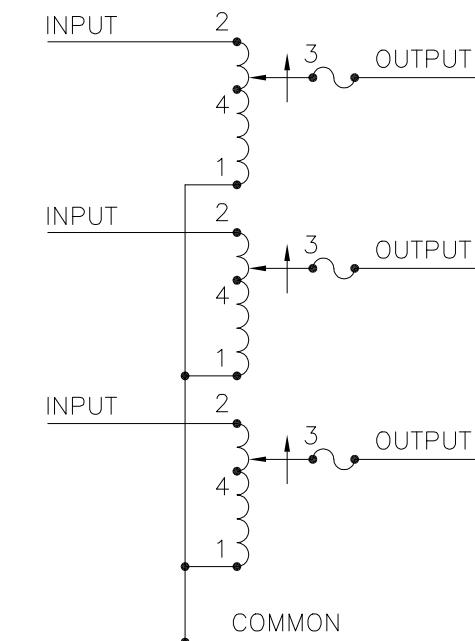


TO BE FLUSH OR BELOW FLUSH WITH BOTTOM MOUNTING PLATE

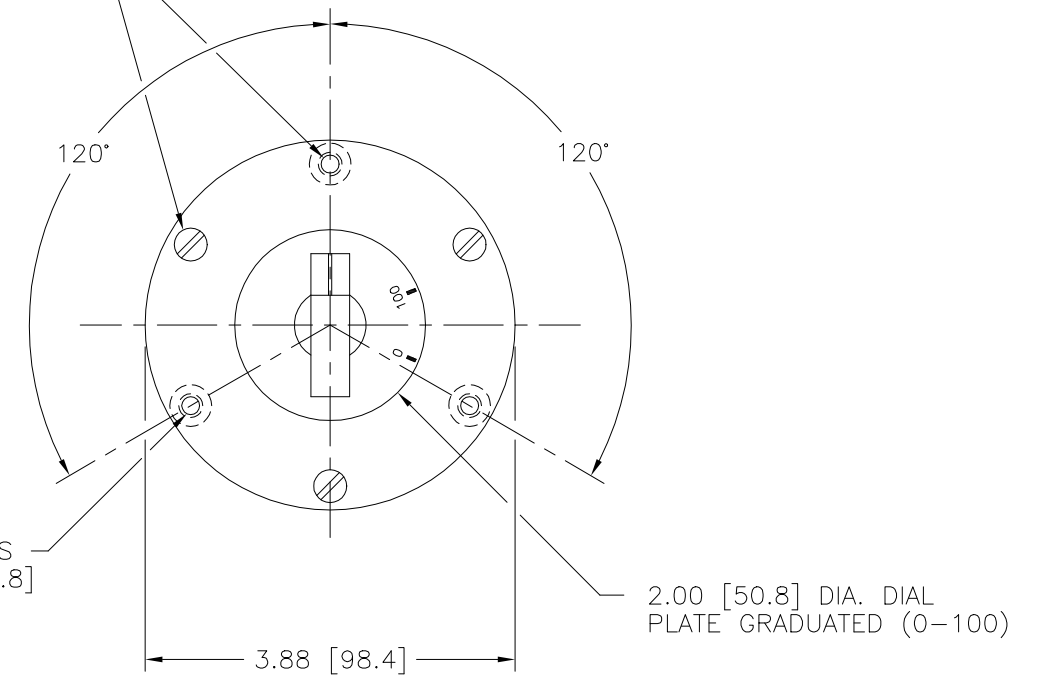

SCHEMATIC
FUSE RECOMMENDED BUT NOT SUPPLIED

77 IF GANGED UNITS ARE USED IN A SYSTEM THAT ORDINARILY HAS A COMMON NEUTRAL OR GROUND BETWEEN SOURCE AND LOAD, THE NEUTRAL OR GROUND MUST BE CONNECTED TO THE COMMON TERMINALS OF THE VARIABLE TRANSFORMER ASSEMBLY. IF THE SYSTEM HAS NO NEUTRAL, THE LOAD MUST BE BALANCED OR THE TRANSFORMERS WILL BE DAMAGED.

■ JUMPERS PROVIDED IN THE STANDARD COMMON POSITION AND SHOULD BE MOVED OR REMOVED AS REQUIRED.

++ LINE TO LINE VOLTAGE.

SPECIFICATIONS											
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS			
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END			
				MAX. AMPS	MAX. KVA	MAX. AMPS		MAX. KVA	INPUT	JUMPER ■	OUTPUT
THREE PHASE WYE 77	240	60	0-240	3.0	1.25	3.5	1.45	CW	1-2	1-1-1	3-3-3
	++							CCW	1-2	2-2-2	3-3-3

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS #	DECIMALS	Holes	ANGLES	DRAFT	UNITS	TITLE:
.XX	.06	.002	1°	1-1/2°	IN [mm]	SPEC. CONTROL DRAWING
MATERIAL:						VARIABLE TRANSFORMER
						TYPE: 291-3
DRAWN BY		DATE	FIRST USED ON	DO NOT SCALE DWG.	CUSTOMER APPROVAL	DATE
K. TOLLIVER		1/02/92				
CHECKER	DATE	WEIGHT APPROX.	CODE IDENT. NO.	DWG. NO.		
		8.25 LBS.	83008	031-0293		
ENGINEER	DATE	SCALE	SHEET 1 OF 1	DWG. NO.		
		1=1		031-0293		

